

## PANORAMA GREEN

panoRama Green is a perforated, self-adhesive window film especially developed for long-term applications. This product is PVC-free and perfect for advertising on glass without affecting the view from the inside out. panoRama Green can also be used on car or bus windows. The requirement for this application is only flat windows, not curved ones.

### Durability

Up to 5 years warranty when used in mid European conditions.

### Printing method

Solvent, eco-solvent, UV curable inks, screen printing and latex

### Shelf life

1 year, stored at +15 to +20° C (59°F to 68°F) and relative humidity between 20% and 70%. In use at +5°C to +40°C (+41°F to +104°F) and relative humidity between 30% and 70%.

### Warranty

Continental Grafix products are warranted to be free of defects in material and manufacture at the time of shipment and to meet the specifications stated in the technical specification sheets. We will replace or refund the price of any Continental Grafix materials found to not meet our product specifications. In no case shall Continental Grafix be liable for any direct, indirect, or consequential damages, including labor or non-Continental Grafix materials charges. The determination of suitability of this product for any specific use is solely the responsibility of the user. No representations, guarantees or warranties of any kind are made to the accuracy of suitability for specific applications.



### Advice


Use more pressure by applying panoRama Green than with other perforated window films.

### Uses

- Shop windows
- Building wraps
- All long-term applications

### Features & Benefit

- PVC free (PET Film)
- Maximum contrast and great visibility
- Excellent removability also after long-term application
- Semi-permanent, clear adhesive offers good removability
- Designed to be combined with the over laminate panoRama Green laminate

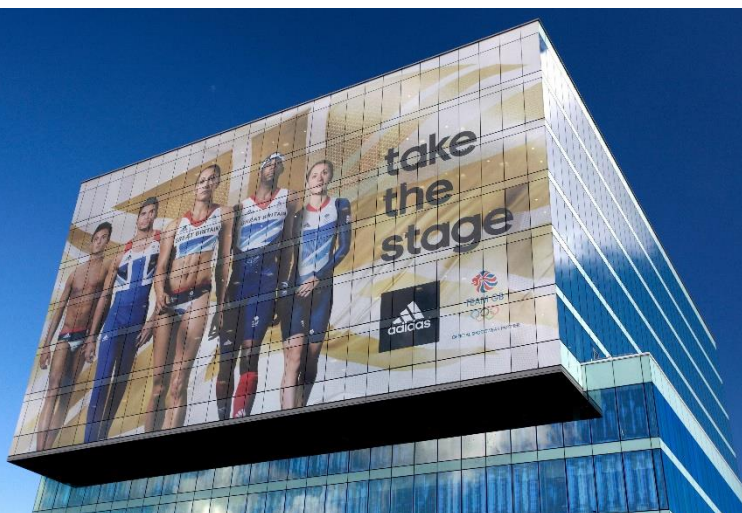

**Technical information**
**panoRama Green**

Size	Width: 1.372 m      Length: 25.00 m, 50.00 m, 200m, 400 m	
Material	Self-adhesive, perforated PET film. Printable white front side and black reserve side for maximum contrast.	125µ +/- 5µ
Adhesive	Removable, semi-permanent clear acrylic adhesive	
Open area Printable area	40% open area 60% printable area	
Liner	UV-liner	220 µ +/- 15µ
Certificate	Flammability	B1
Application	Minimum application temperature	+10°C bis zu +30°C (+50°F bis +86°F)
	Minimum service temperature	- 17°C bis +50 °C (+0°F bis +122°F)

**CONTINENTAL GRAFIX AG**

Lettenstrasse 2  
6343 Rotkreuz  
Switzerland

**CONTACT**

Phone: +41 41 763 66 88  
Fax: +41 41 763 60 14  
Email: [info@continentalgrafix.com](mailto:info@continentalgrafix.com)

**MORE INFORMATION**

For a detailed overview of our products please visit:  
[www.continentalgrafix.com](http://www.continentalgrafix.com)